

## 6. Approximation and fitting

- norm approximation
- least-norm problems
- regularized approximation
- robust approximation

6-1

### Norm approximation

$$\text{minimize } \|Ax - b\|$$

( $A \in \mathbf{R}^{m \times n}$  with  $m \geq n$ ,  $\|\cdot\|$  is a norm on  $\mathbf{R}^m$ )

interpretations of solution  $x^* = \operatorname{argmin}_x \|Ax - b\|$ :

- **geometric**:  $Ax^*$  is point in  $\mathcal{R}(A)$  closest to  $b$
- **estimation**: linear measurement model

$$y = Ax + v$$

$y$  are measurements,  $x$  is unknown,  $v$  is measurement error

given  $y = b$ , best guess of  $x$  is  $x^*$

- **optimal design**:  $x$  are design variables (input),  $Ax$  is result (output)  
 $x^*$  is design that best approximates desired result  $b$

## examples

- least-squares approximation ( $\|\cdot\|_2$ ): solution satisfies normal equations

$$A^T Ax = A^T b$$

$$(x^* = (A^T A)^{-1} A^T b \text{ if } \mathbf{rank} A = n)$$

- Chebyshev approximation ( $\|\cdot\|_\infty$ ): can be solved as an LP

$$\begin{aligned} &\text{minimize} && t \\ &\text{subject to} && -t\mathbf{1} \preceq Ax - b \preceq t\mathbf{1} \end{aligned}$$

- sum of absolute residuals approximation ( $\|\cdot\|_1$ ): can be solved as an LP

$$\begin{aligned} &\text{minimize} && \mathbf{1}^T y \\ &\text{subject to} && -y \preceq Ax - b \preceq y \end{aligned}$$

## Penalty function approximation

$$\begin{aligned} &\text{minimize} && \phi(r_1) + \cdots + \phi(r_m) \\ &\text{subject to} && r = Ax - b \end{aligned}$$

( $A \in \mathbf{R}^{m \times n}$ ,  $\phi: \mathbf{R} \rightarrow \mathbf{R}$  is a convex penalty function)


### examples

- quadratic:  $\phi(u) = u^2$
- deadzone-linear with width  $a$ :

$$\phi(u) = \max\{0, |u| - a\}$$


- log-barrier with limit  $a$ :

$$\phi(u) = \begin{cases} -a^2 \log(1 - (u/a)^2) & |u| < a \\ \infty & \text{otherwise} \end{cases}$$

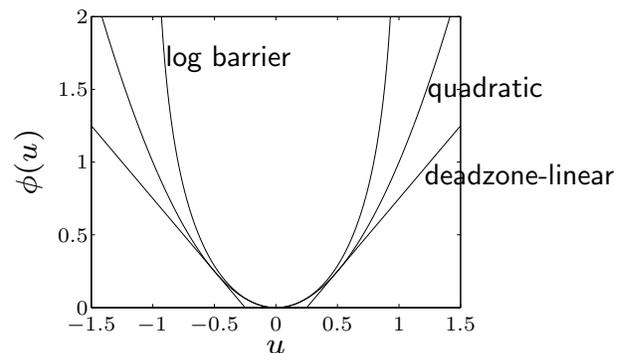

**example** ( $m = 100, n = 30$ ): histogram of residuals for penalties

$$\phi(u) = |u|, \quad \phi(u) = u^2, \quad \phi(u) = \max\{0, |u| - a\}, \quad \phi(u) = -\log(1 - u^2)$$


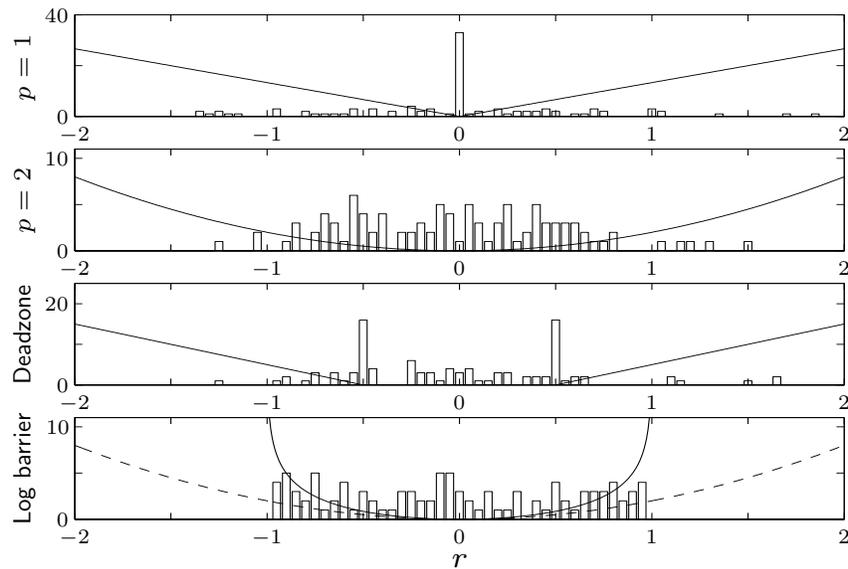


shape of penalty function has large effect on distribution of residuals

### Huber penalty function (with parameter $M$ )

$$\phi_{\text{hub}}(u) = \begin{cases} u^2 & |u| \leq M \\ M(2|u| - M) & |u| > M \end{cases}$$

linear growth for large  $u$  makes approximation less sensitive to outliers

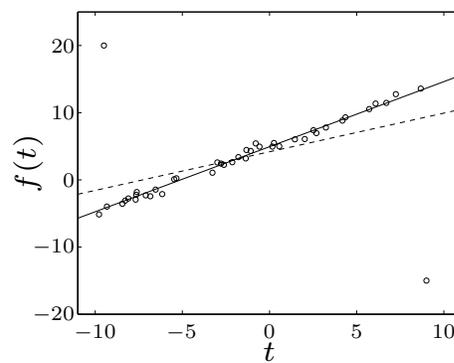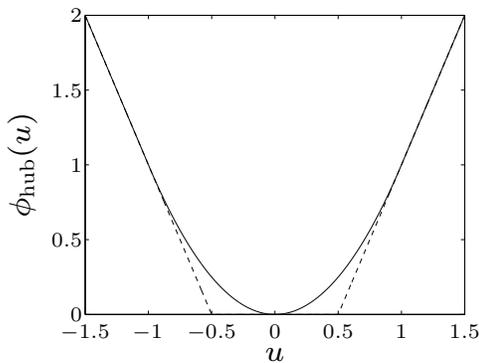

- left: Huber penalty for  $M = 1$
- right: affine function  $f(t) = \alpha + \beta t$  fitted to 42 points  $t_i, y_i$  (circles) using quadratic (dashed) and Huber (solid) penalty

## Least-norm problems

$$\begin{array}{ll} \text{minimize} & \|x\| \\ \text{subject to} & Ax = b \end{array}$$

( $A \in \mathbf{R}^{m \times n}$  with  $m \leq n$ ,  $\|\cdot\|$  is a norm on  $\mathbf{R}^n$ )

interpretations of solution  $x^* = \operatorname{argmin}_{Ax=b} \|x\|$ :

- **geometric:**  $x^*$  is point in affine set  $\{x \mid Ax = b\}$  with minimum distance to 0
- **estimation:**  $b = Ax$  are (perfect) measurements of  $x$ ;  $x^*$  is smallest ('most plausible') estimate consistent with measurements
- **design:**  $x$  are design variables (inputs);  $b$  are required results (outputs)  
 $x^*$  is smallest ('most efficient') design that satisfies requirements

### examples

- least-squares solution of linear equations ( $\|\cdot\|_2$ ):  
can be solved via optimality conditions

$$2x + A^T \nu = 0, \quad Ax = b$$

- minimum sum of absolute values ( $\|\cdot\|_1$ ): can be solved as an LP

$$\begin{array}{ll} \text{minimize} & \mathbf{1}^T y \\ \text{subject to} & -y \preceq x \preceq y, \quad Ax = b \end{array}$$

tends to produce sparse solution  $x^*$

### extension: least-penalty problem

$$\begin{array}{ll} \text{minimize} & \phi(x_1) + \cdots + \phi(x_n) \\ \text{subject to} & Ax = b \end{array}$$

$\phi : \mathbf{R} \rightarrow \mathbf{R}$  is convex penalty function

## Regularized approximation

$$\text{minimize (w.r.t. } \mathbf{R}_+^2 \text{)} \quad (\|Ax - b\|, \|x\|)$$

$A \in \mathbf{R}^{m \times n}$ , norms on  $\mathbf{R}^m$  and  $\mathbf{R}^n$  can be different

interpretation: find good approximation  $Ax \approx b$  with small  $x$

- **estimation:** linear measurement model  $y = Ax + v$ , with prior knowledge that  $\|x\|$  is small
- **optimal design:** small  $x$  is cheaper or more efficient, or the linear model  $y = Ax$  is only valid for small  $x$
- **robust approximation:** good approximation  $Ax \approx b$  with small  $x$  is less sensitive to errors in  $A$  than good approximation with large  $x$

## Scalarized problem

$$\text{minimize} \quad \|Ax - b\| + \gamma\|x\|$$

- solution for  $\gamma > 0$  traces out optimal trade-off curve
- other common method: minimize  $\|Ax - b\|^2 + \delta\|x\|^2$  with  $\delta > 0$

## Tikhonov regularization

$$\text{minimize} \quad \|Ax - b\|_2^2 + \delta\|x\|_2^2$$

can be solved as a least-squares problem

$$\text{minimize} \quad \left\| \begin{bmatrix} A \\ \sqrt{\delta}I \end{bmatrix} x - \begin{bmatrix} b \\ 0 \end{bmatrix} \right\|_2^2$$

$$\text{solution } x^* = (A^T A + \delta I)^{-1} A^T b$$

# Optimal input design

linear dynamical system with impulse response  $h$ :

$$y(t) = \sum_{\tau=0}^t h(\tau)u(t - \tau), \quad t = 0, 1, \dots, N$$

**input design problem:** multicriterion problem with 3 objectives

1. tracking error with desired output  $y_{\text{des}}$ :  $J_{\text{track}} = \sum_{t=0}^N (y(t) - y_{\text{des}}(t))^2$
2. input magnitude:  $J_{\text{mag}} = \sum_{t=0}^N u(t)^2$
3. input variation:  $J_{\text{der}} = \sum_{t=0}^{N-1} (u(t+1) - u(t))^2$

track desired output using a small and slowly varying input signal


**regularized least-squares formulation**

$$\text{minimize } J_{\text{track}} + \delta J_{\text{der}} + \eta J_{\text{mag}}$$

for fixed  $\delta, \eta$ , a least-squares problem in  $u(0), \dots, u(N)$

**example:** 3 solutions on optimal trade-off curve

(top)  $\delta = 0$ , small  $\eta$ ; (middle)  $\delta = 0$ , larger  $\eta$ ; (bottom) large  $\delta$

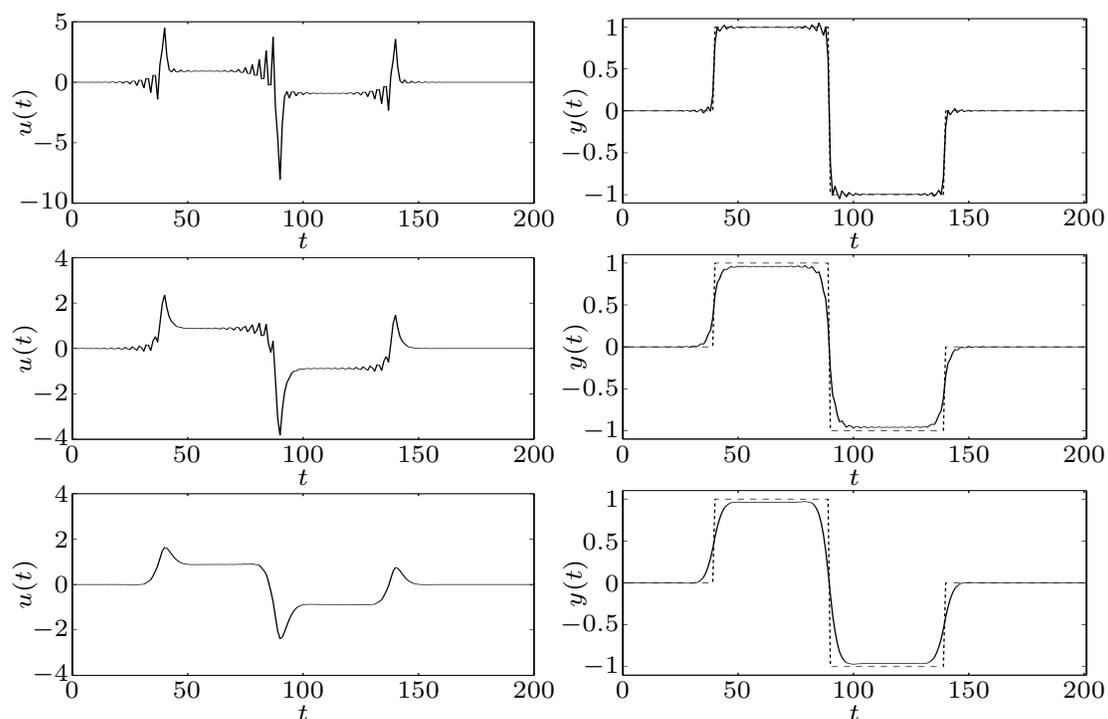

# Signal reconstruction


$$\text{minimize (w.r.t. } \mathbf{R}_+^2) \quad (\|\hat{x} - x_{\text{cor}}\|_2, \phi(\hat{x}))$$

- $x \in \mathbf{R}^n$  is unknown signal
- $x_{\text{cor}} = x + v$  is (known) corrupted version of  $x$ , with additive noise  $v$
- variable  $\hat{x}$  (reconstructed signal) is estimate of  $x$
- $\phi : \mathbf{R}^n \rightarrow \mathbf{R}$  is regularization function or smoothing objective

**examples:** quadratic smoothing, total variation smoothing:

$$\phi_{\text{quad}}(\hat{x}) = \sum_{i=1}^{n-1} (\hat{x}_{i+1} - \hat{x}_i)^2, \quad \phi_{\text{tv}}(\hat{x}) = \sum_{i=1}^{n-1} |\hat{x}_{i+1} - \hat{x}_i|$$


## quadratic smoothing example

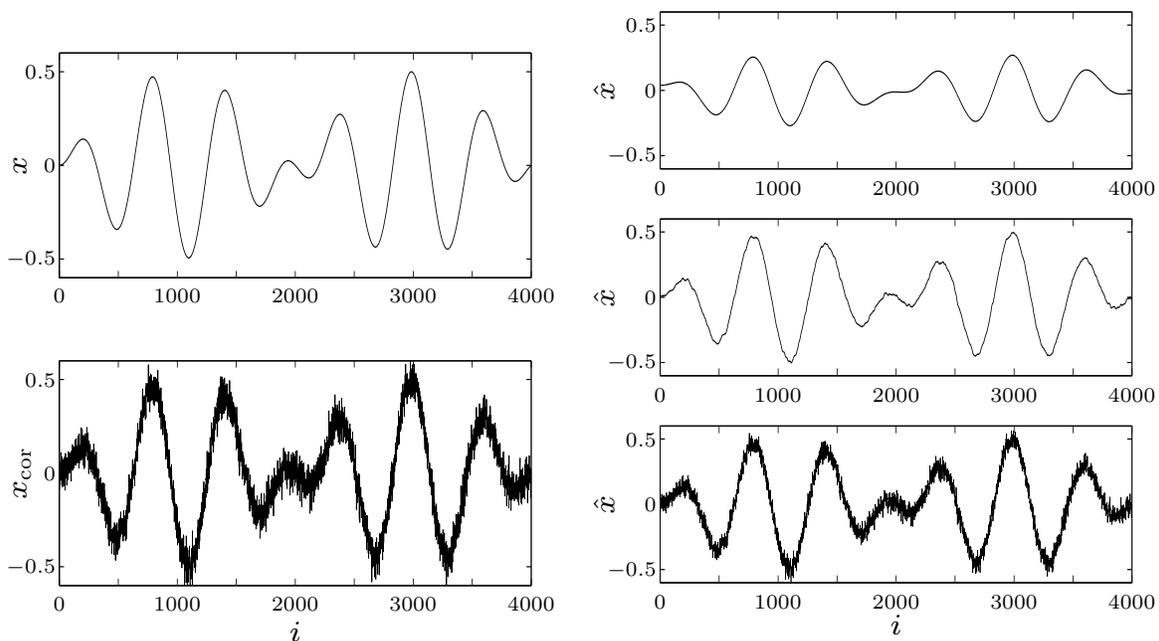


original signal  $x$  and noisy  
signal  $x_{\text{cor}}$

three solutions on trade-off curve  
 $\|\hat{x} - x_{\text{cor}}\|_2$  versus  $\phi_{\text{quad}}(\hat{x})$

## total variation reconstruction example

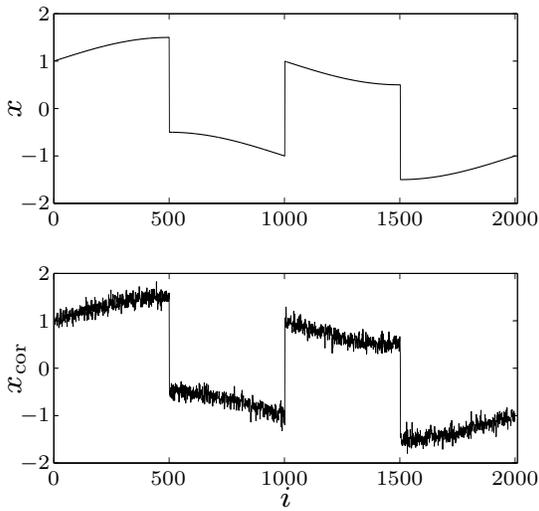


original signal  $x$  and noisy signal  $x_{\text{cor}}$

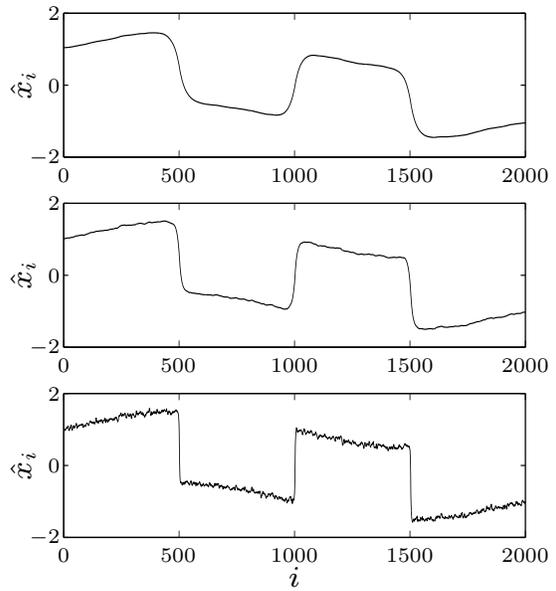


three solutions on trade-off curve  $\|\hat{x} - x_{\text{cor}}\|_2$  versus  $\phi_{\text{quad}}(\hat{x})$

quadratic smoothing smooths out noise **and** sharp transitions in signal

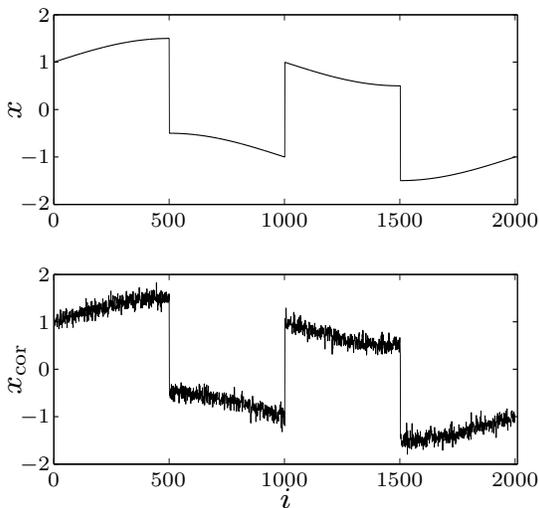

original signal  $x$  and noisy signal  $x_{\text{cor}}$

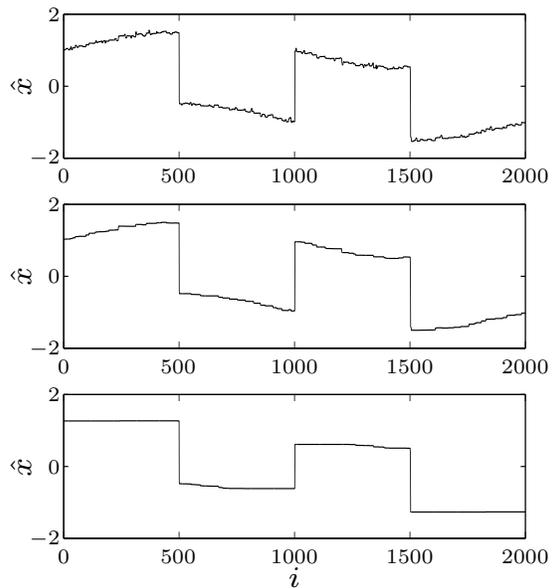

three solutions on trade-off curve  $\|\hat{x} - x_{\text{cor}}\|_2$  versus  $\phi_{\text{tv}}(\hat{x})$

total variation smoothing preserves sharp transitions in signal

## Robust approximation

minimize  $\|Ax - b\|$  with uncertain  $A$

two approaches:


- **stochastic:** assume  $A$  is random, minimize  $\mathbf{E} \|Ax - b\|$
- **worst-case:** set  $\mathcal{A}$  of possible values of  $A$ , minimize  $\sup_{A \in \mathcal{A}} \|Ax - b\|$

tractable only in special cases (certain norms  $\|\cdot\|$ , distributions, sets  $\mathcal{A}$ )

**example:**  $A(u) = A_0 + uA_1$

- $x_{\text{nom}}$  minimizes  $\|A_0x - b\|_2^2$
- $x_{\text{stoch}}$  minimizes  $\mathbf{E} \|A(u)x - b\|_2^2$   
with  $u$  uniform on  $[-1, 1]$
- $x_{\text{wc}}$  minimizes  $\sup_{-1 \leq u \leq 1} \|A(u)x - b\|_2^2$

figure shows  $r(u) = \|A(u)x - b\|_2^2$

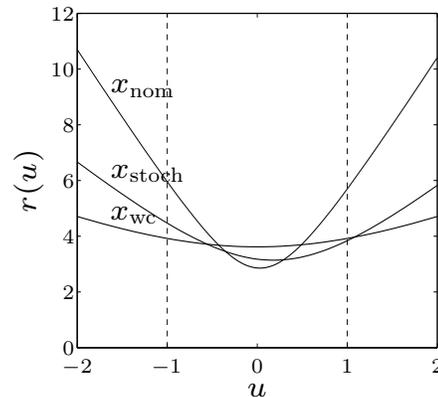

Approximation and fitting

6-17

**stochastic robust LS** with  $A = \bar{A} + U$ ,  $U$  random,  $\mathbf{E}U = 0$ ,  $\mathbf{E}U^T U = P$

$$\text{minimize } \mathbf{E} \|(\bar{A} + U)x - b\|_2^2$$

- explicit expression for objective:

$$\begin{aligned} \mathbf{E} \|Ax - b\|_2^2 &= \mathbf{E} \|\bar{A}x - b + Ux\|_2^2 \\ &= \|\bar{A}x - b\|_2^2 + \mathbf{E} x^T U^T U x \\ &= \|\bar{A}x - b\|_2^2 + x^T P x \end{aligned}$$

- hence, robust LS problem is equivalent to LS problem

$$\text{minimize } \|\bar{A}x - b\|_2^2 + \|P^{1/2}x\|_2^2$$

- for  $P = \delta I$ , get Tikhonov regularized problem

$$\text{minimize } \|\bar{A}x - b\|_2^2 + \delta \|x\|_2^2$$

Approximation and fitting

6-18

**worst-case robust LS** with  $\mathcal{A} = \{\bar{A} + u_1 A_1 + \dots + u_p A_p \mid \|u\|_2 \leq 1\}$

$$\text{minimize } \sup_{A \in \mathcal{A}} \|Ax - b\|_2^2 = \sup_{\|u\|_2 \leq 1} \|P(x)u + q(x)\|_2^2$$

where  $P(x) = [A_1 x \quad A_2 x \quad \dots \quad A_p x]$ ,  $q(x) = \bar{A}x - b$

- from page 5–14, strong duality holds between the following problems

$$\begin{array}{ll} \text{maximize} & \|Pu + q\|_2^2 \\ \text{subject to} & \|u\|_2^2 \leq 1 \end{array} \quad \begin{array}{ll} \text{minimize} & t + \lambda \\ \text{subject to} & \begin{bmatrix} I & P & q \\ P^T & \lambda I & 0 \\ q^T & 0 & t \end{bmatrix} \succeq 0 \end{array}$$


- hence, robust LS problem is equivalent to SDP

$$\begin{array}{ll} \text{minimize} & t + \lambda \\ \text{subject to} & \begin{bmatrix} I & P(x) & q(x) \\ P(x)^T & \lambda I & 0 \\ q(x)^T & 0 & t \end{bmatrix} \succeq 0 \end{array}$$

**example:** histogram of residuals

$$r(u) = \|(A_0 + u_1 A_1 + u_2 A_2)x - b\|_2$$

with  $u$  uniformly distributed on unit disk, for three values of  $x$

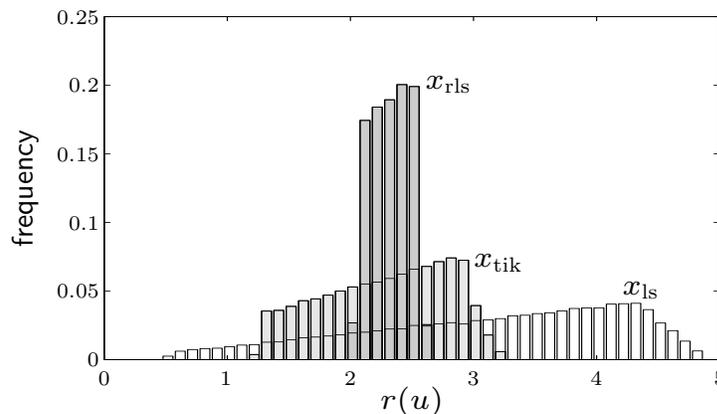

- $x_{ls}$  minimizes  $\|A_0 x - b\|_2$
- $x_{tik}$  minimizes  $\|A_0 x - b\|_2^2 + \|x\|_2^2$  (Tikhonov solution)
- $x_{wc}$  minimizes  $\sup_{\|u\|_2 \leq 1} \|A_0 x - b\|_2^2 + \|x\|_2^2$